

NITO Compressed Air Couplings KS

For use where you want a quick and secure hose connection for connecting compressed air tools.



MAX
35 BAR

MAX
80 °C



For use where you want a quick and secure hose connection for connecting compressed air tools.

The knurled coupling body and coupling nipples have been manufactured from hardened steel to prevent the couplings from being damaged even in the event of rough treatment. All parts have been treated to protect against rust. The body and nipples are made of high-quality brass and nickel-plated. The springs and balls are made of stainless steel.

Assortment

The coupling is manufactured in two sizes, 1/4" and 3/8", with different capacities and can be supplied with accessories covering a wide range of applications with many possible combinations.

Technical specifications:


Pressure: Max. 35 bar
Temperature: Max. 80°C

Material:

1. Brass, nickel-plated
2. Rubber NBR 70 Sh
3. Stainless steel
4. Brass
5. Free-cutting steel, hardened and nickelplated


NITO Compressed Air Couplings KS

Item Number
50000A9 KS 1/4" Coupler with 1/4" female thread BSP
50200A9 KS 3/8" Coupler with 3/8" female BSP
50001A9 KS 1/4" Coupler with 1/4" male thread BSP
50201A9 KS 3/8" Coupler with 3/8" male BSP

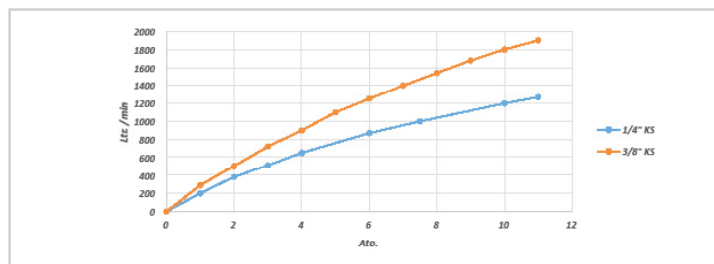


Items shown represent only a small sample of our product assortment.
See the full range on our website or contact NITO.

Item Number
50041A9 KS 1/4" Nipple with 8 mm hose tail
50240A9 KS 3/8" Nipple with 10 mm hose tail
51521A9 KS 1/4" Nipple with 1/4" male BSP
51561A9 KS 3/8" Nipple with 3/8" male BSP

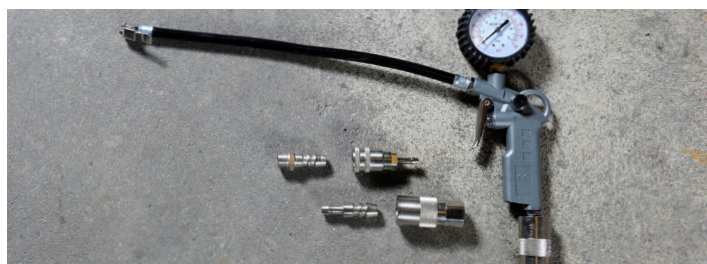

More NITO products

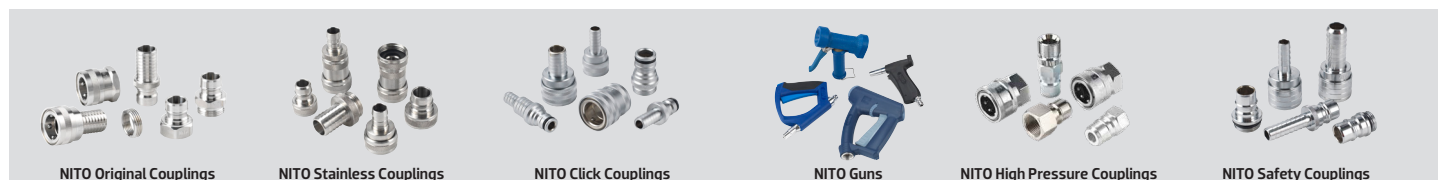

NITO A/S
H. C. Ørstedvej 4
DK-6100 Haderslev
Phone: +45 7452 6363
Fax: +45 7453 2220
E-mail: nito@nito.dk
www.nito.dk

